




microswitch

for NH fuse links

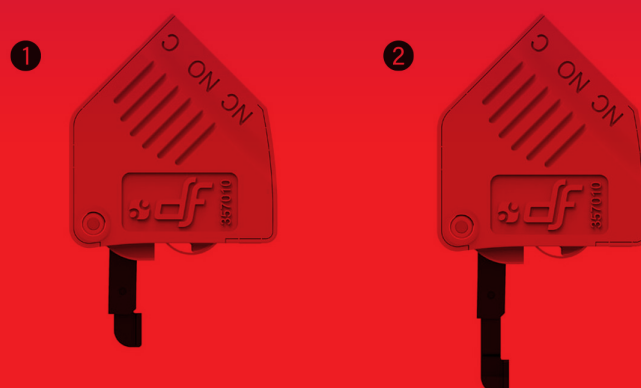

**PROTECTING
THE WORLD**

microswitch

for NH fuse links



RATED VOLTAGE
250V AC

RATED CURRENT
5A



Microswitch for NH fuse links with top indicator

Presence and fusing.

Manual assembly.

Compact design.


Two positions.

Manufactured with plastic materials with high temperature resistance and self-extinguishable.

All materials are according to the European Directive RoHS (Restriction of the use of certain hazardous substances in electrical material) and they are halogen free.



Dimensions

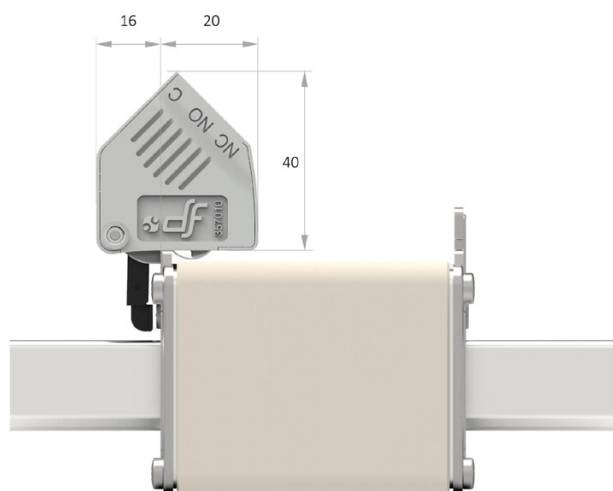

Weight 12gr

Range

REFERENCE	DESCRIPTION	PACKING
		Uni /BOX
357010	MICROSWITCH FOR NH FUSELINKS NH000...NH3	1/12

microswitch


for NH fuse links



Technical data

Rated voltage	250V AC	
Rated current	5A	
Use of microswitch in DC (utilization category DC-12)	5A	24V DC
	2A	48V DC
	0.4A	127V DC
	0.2A	240V DC
Impulse withstand voltage between power circuits and microswitch terminals	$U_{imp} > 8 \text{ kV}$	
Dielectric withstand voltage between power circuits and microswitch terminals	7kV – 1 min. 50Hz	
Storage temperature	-40°C ... 80°C	
Operating temperature	-20°C ... 70°C	
Faston terminals dimensions	2,8 x 0,5mm	


Change work position

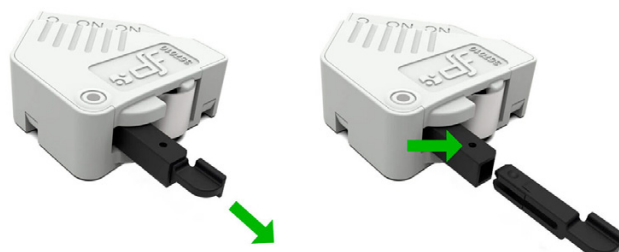

Extract mobile lever

Insert until position 2 (see arrow)


Microswitch assembly

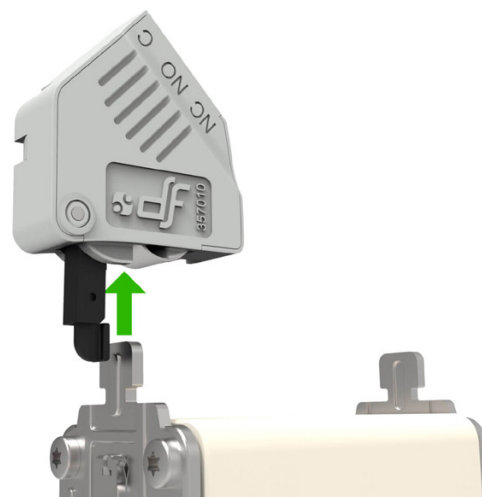

Materials

Terminals	Brass
Contacts	Silver
Body	Thermoplastic with high resistance to temperature


Positions

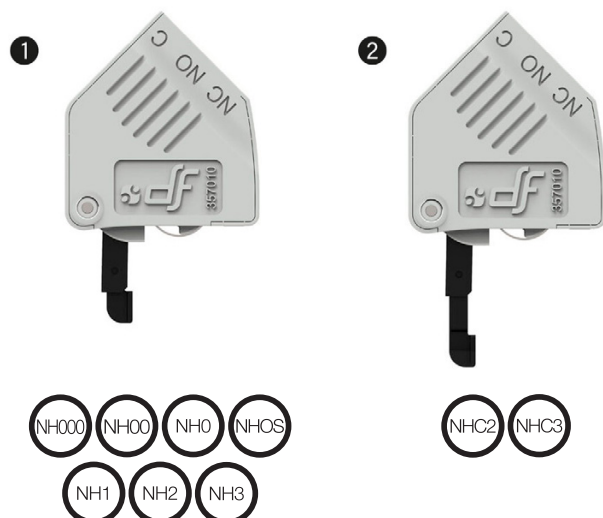

IP20 NH fuseholder with microswitch

The microswitch can also be used in NH fuse links with IP20 protection. Ask for available references.



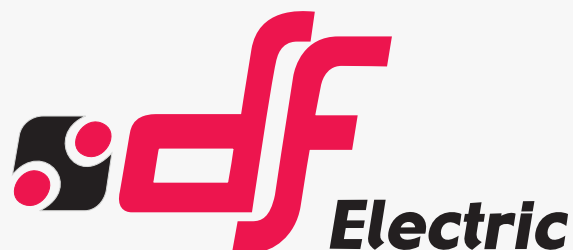

PROTECTING THE WORLD

HEAD OFFICE AND FACTORY


SILICI, 67-69
08940 CORNELLA DE LLOBREGAT
BARCELONA · SPAIN
Tel. +34 93 377 85 85
Fax +34 93 377 82 82

INTERNATIONAL SALES

Tel. +34 93 475 08 64
Fax +34 93 480 07 75
export@dfelectric.es

NATIONAL SALES

Tel. 93 475 08 64
Fax 93 480 07 76
comercial@dfelectric.es

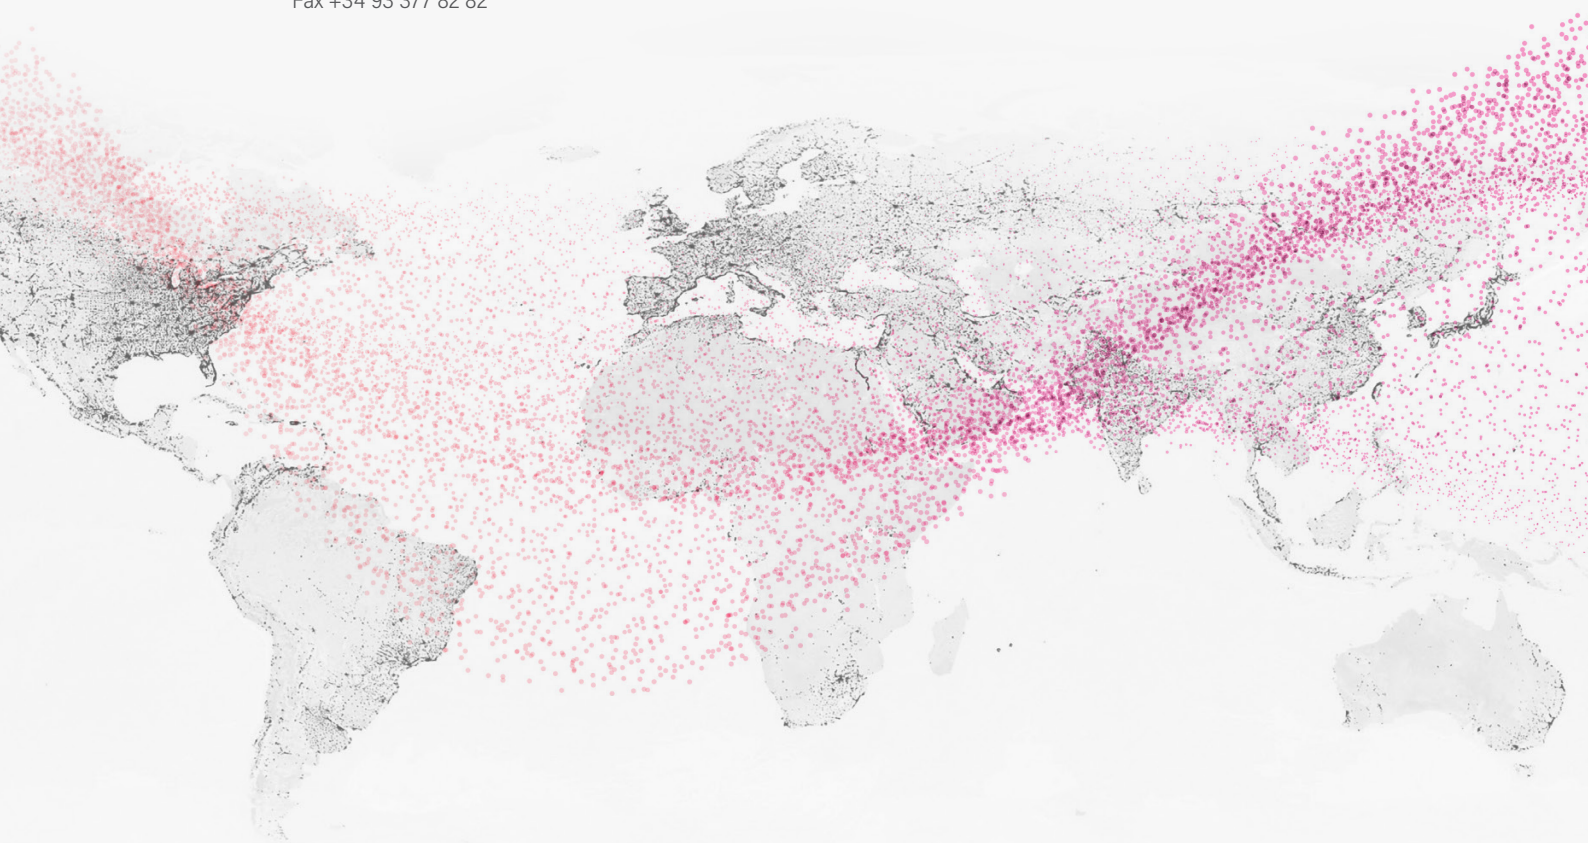

dfelectric.es



According to the waste of electrical and electronic equipment directive, electrical material should not be part of the usual waste. This symbol alerts users that these products should be recycled according to local environmental waste disposal regulations.



The "electro technical expert" logo marked on the products included in this data sheet indicates that the installation of these products must be carried out by expert personnel with specialized knowledge.



To prevent electrical hazards, carry out the installation without voltage.



Safety notice
Please capture the following QR code and read our safety notice carefully before installing our products.



The data reflected in this technical record are subject to the correct installation of the product in accordance with manufacturer's instructions, relevant installation standards and professional practices, maintained and used in applications for which they were made.

The products described in this document have been designed, developed and tested in accordance with specific standard. They are considered components that are integrated as part of installation, machine or equipment. The correct general operation of the referred product is responsibility of the manufacturer of the installation, machine or equipment.

DF ELECTRIC cannot guarantee the characteristics of an installation, machine or equipment that has been designed by a third party. Once a product has been selected, the user must verify that it is appropriate for its application, through the verifications and/or tests that it deems appropriate.

DF ELECTRIC retains the right to change the dimensions, specifications, materials or design of its products at any time with or without notice.

©2019 DF Electric. All rights reserved