


Rapidplus®

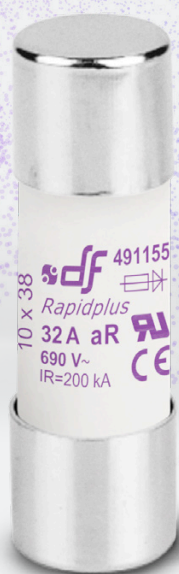



**PROTECTING
THE WORLD**


RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

aR CYLINDRICAL

semiconductor protection
fuse links



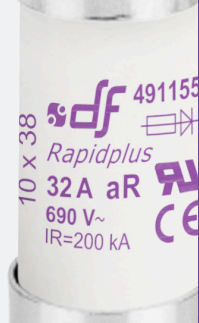


RATED VOLTAGE
690V AC

RATED CURRENT
1A...32A

BREAKING CAPACITY
200kA

STANDARDS

IEC/EN 60269-1
IEC/EN 60269-4
UL248-1
UL248-13

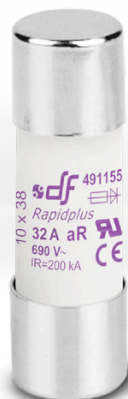

Rapidplus®

Cylindrical fuse links for semiconductors

RAPIDPLUS CYL aR fuse links are intended for clearing short-circuits and have been designed and manufactured to have very low I^2t values as well as reduced arc voltages that guarantee an optimum protection of semiconductors. They have a very good cycling ability.

The range comprises the following fuse links:


→ Size 10x38 690V AC 1A to 32A

Typical applications comprise protection of semiconductors (diodes, thyristors, triacs, etc) used in power rectifiers, UPS, converters, motor drives (AC and DC), soft starters, solid state relays, photovoltaic inverters, welding inverters and any application where it is necessary to protect semiconductor devices.

UL certification according to UL248 standard. UL file Nr. E477155.





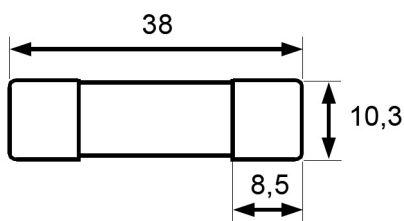








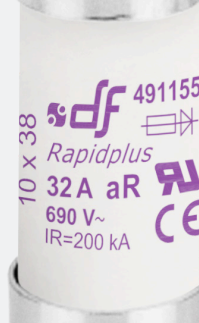
Dimensions



Weight 8gr

Range

I_n (A)	REFERENCE	PACKING Uni /BOX
1	491105	10/100
2	491107 	10/100
3	491100 	10/100
4	491113 	10/100
6	491115 	10/100
8	491120 	10/100
10	491125 	10/100
12	491130 	10/100
16	491135 	10/100
20	491140 	10/100
25	491145 	10/100
32	491155 	10/100



Technical data

Rated voltage	690V AC 700V DC (L/R=10ms)
Rated current	1A...32A
Rated breaking capacity	200kA @690V AC 30kA @700V DC
Utilization category	aR
Storage temperature	-40°C ... 90°C
Operating temperature *	-40°C ... 80°C

* For ambient temperatures higher than 25°C it is necessary to apply a derating in maximum current.

Standards

IEC/EN 60269-1
IEC/EN 60269-4
UL248-1
UL248-13
RoHS Compliant




Certifications




Power dissipation



I_n (A)	POWER DISSIPATION I_n (W)	POWER DISSIPATION $0.8 \cdot I_n$ (W)	PREARcing I^2t (A ² S)	I^2t 690V (A ² S)
1	0,75	0,45	0,20	1,2
2	1,40	0,75	0,80	2,6
3	1,70	0,95	2,5	8,0
4	1,69	0,97	4,9	10
6	2,46	1,4	14,0	28
8	1,52	0,91	3,0	24
10	2,07	1,23	4,7	38
12	2,62	1,53	6,8	54
16	3,72	2,11	12,0	96
20	4,50	2,57	18,8	150
25	4,55	2,60	48,0	384
32	6,65	3,65	75,0	600

t-I characteristics

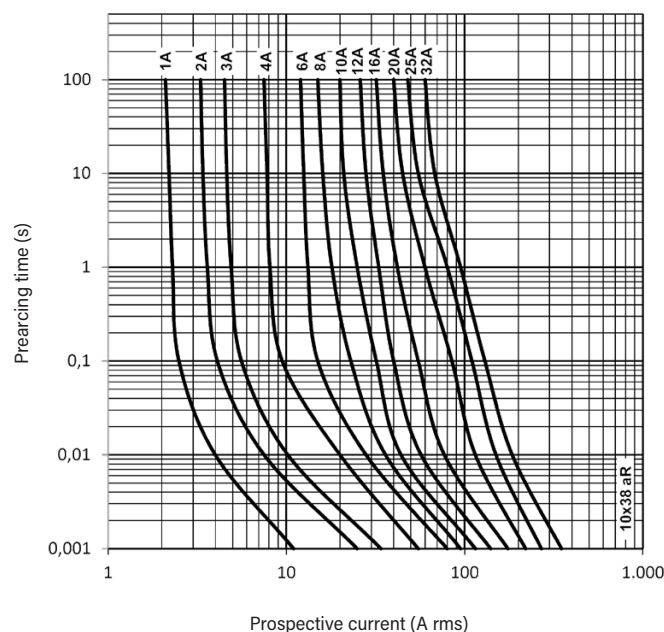

Cut-off characteristics

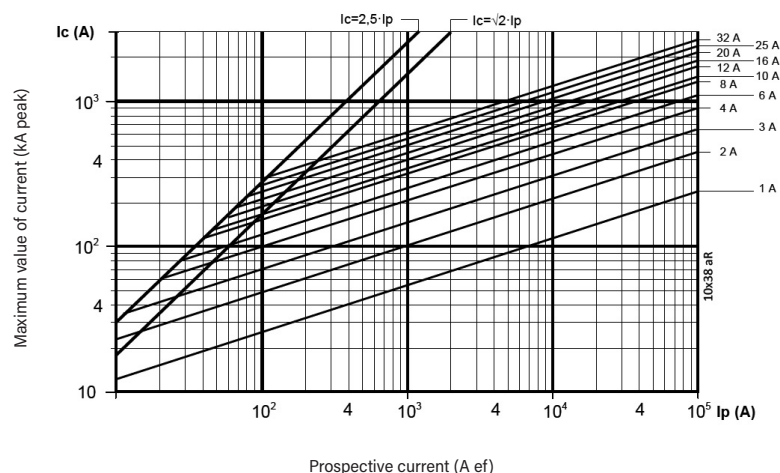


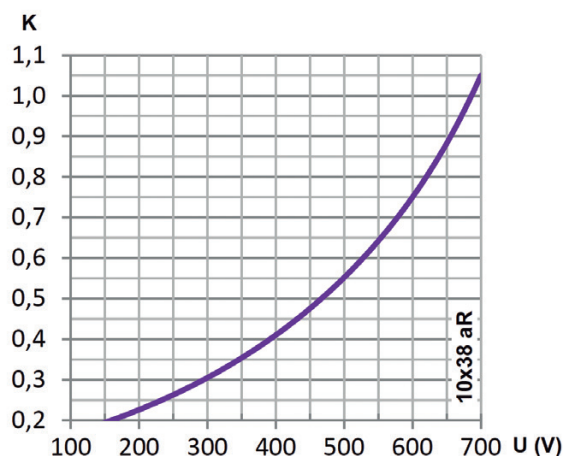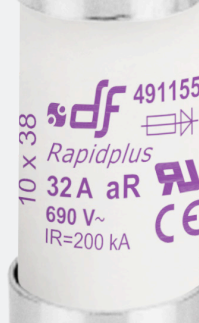

I²t Correction factor

The total clearing I^2t at rated voltage and at power factor of 0,15 are given in the electrical characteristics.


For other voltages, the clearing I^2t is found by multiplying by correction factor, K .

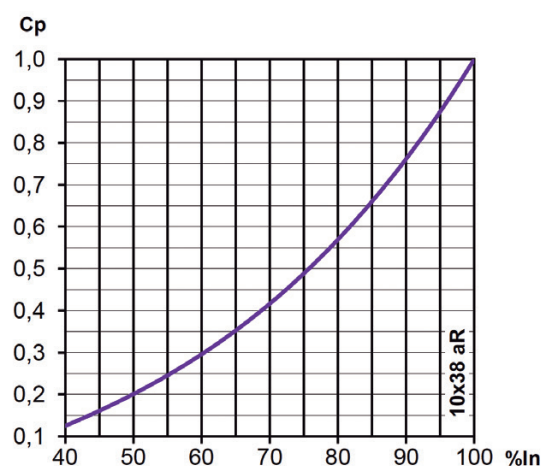

Correction factor for power loss


Watts loss at rated current are given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated value.

The correction factor C_p , is given as a function of the RMS load current I_b in % of the rated current.

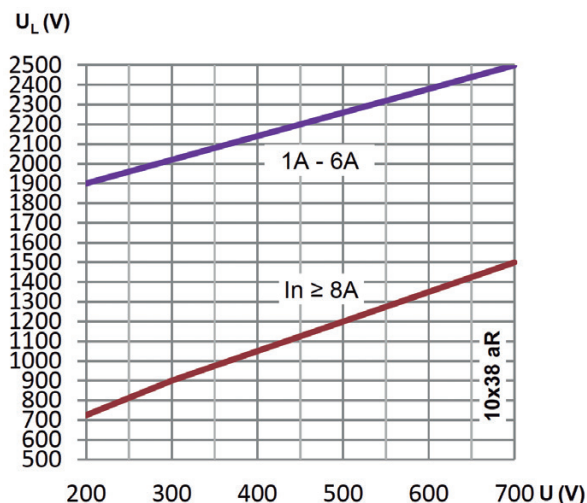



Peak arc voltage

This curve gives the peak arc voltage, U_L , which may appear across the fuse during its operation as a function of the applied working voltage, E_g (RMS) at a power factor of 0,15.

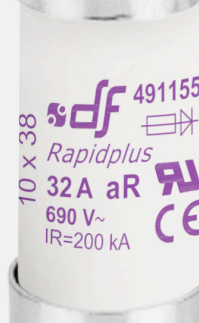

Ambient temperature derating factor

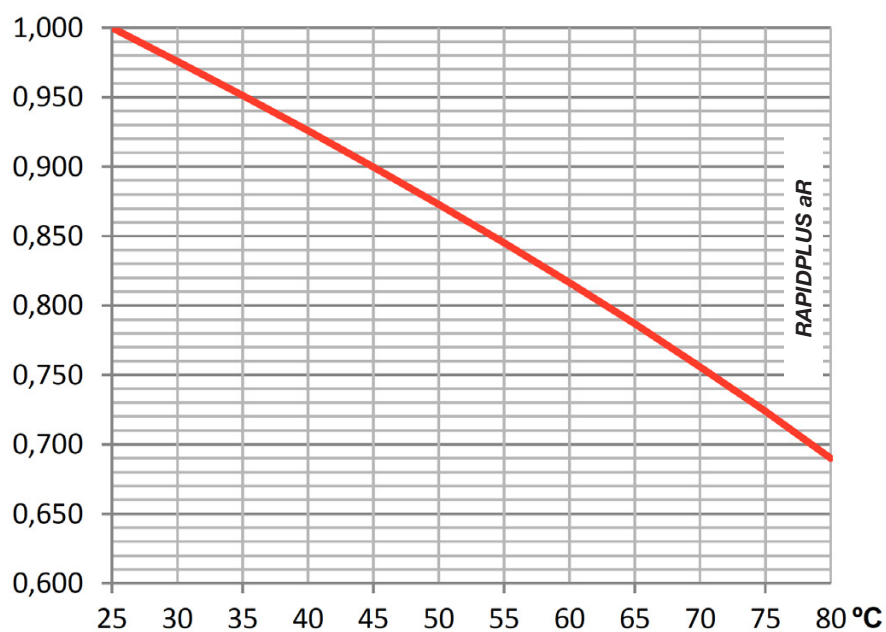



Use of Rapidplus® in PMX fuse holders

The modular fuse holders for cylindrical fuses have a rated power acceptance according to the maximum power dissipations allowed for the general use fuse links (gG) and back up fuse links.

These maximum values allowed for the fuse links (gG/aM) are regulated by standards (IEC/EN60269-2). In the same way, this standards specify the minimum power acceptance for the fuse holders. This power acceptance is the power dissipated by the fuse links (converted in heat) that the fuse holder can accept with an acceptable increase of the temperature (values also regulated by standards).

The fuse links for protection of semiconductors RAPIDPLUS have a rated power dissipation (or power loss) higher than the gG or aM types, and for this reason there are some limitations for the application of these fuses in closed modular fuse holders.

It is necessary to check that the fuse links have a power diissipation not higher than the maximum value admissible of the fuse holder indicated by the manufacturer.

When it is no possible to use modular fuse holders the solution is the use of an open fuse base where the heat can be appropriately dissipated.

In the following table are indicated the maximum values of power acceptance for DF ELECTRIC fuse holders. These limits should never be exceeded:



RATED POWER ACCEPTANCE
IEC/EN60269-2 **3W**

MAX. POWER ACCEPTANCE
OF ELECTRIC FUSE HOLDERS **4W**

I_n (A)	MAXIMUM CURRENT
1	1A
2	2A
3	3A
4	4A
6	6A
8	8A
10	10A
12	12A
16	16A
20	19A
25	23A
32	26A

Use of Rapidplus® in BAC Open fuse bases

There are open type fuse bases (BAC) with high values of acceptable power disipations, where heat can be evacuated appropriately.



MAX. POWER ACCEPTANCE
OF ELECTRIC FUSE HOLDERS **8W**



PROTECTING THE WORLD



HEAD OFFICE AND FACTORY


SILICI, 67-69
08940 CORNELLA DE LLOBREGAT
BARCELONA · SPAIN
Tel. +34 93 377 85 85
Fax +34 93 377 82 82

INTERNATIONAL SALES

Tel. +34 93 475 08 64
Fax +34 93 480 07 75
export@dfelectric.es

NATIONAL SALES

Tel. 93 475 08 64
Fax 93 480 07 76
comercial@dfelectric.es

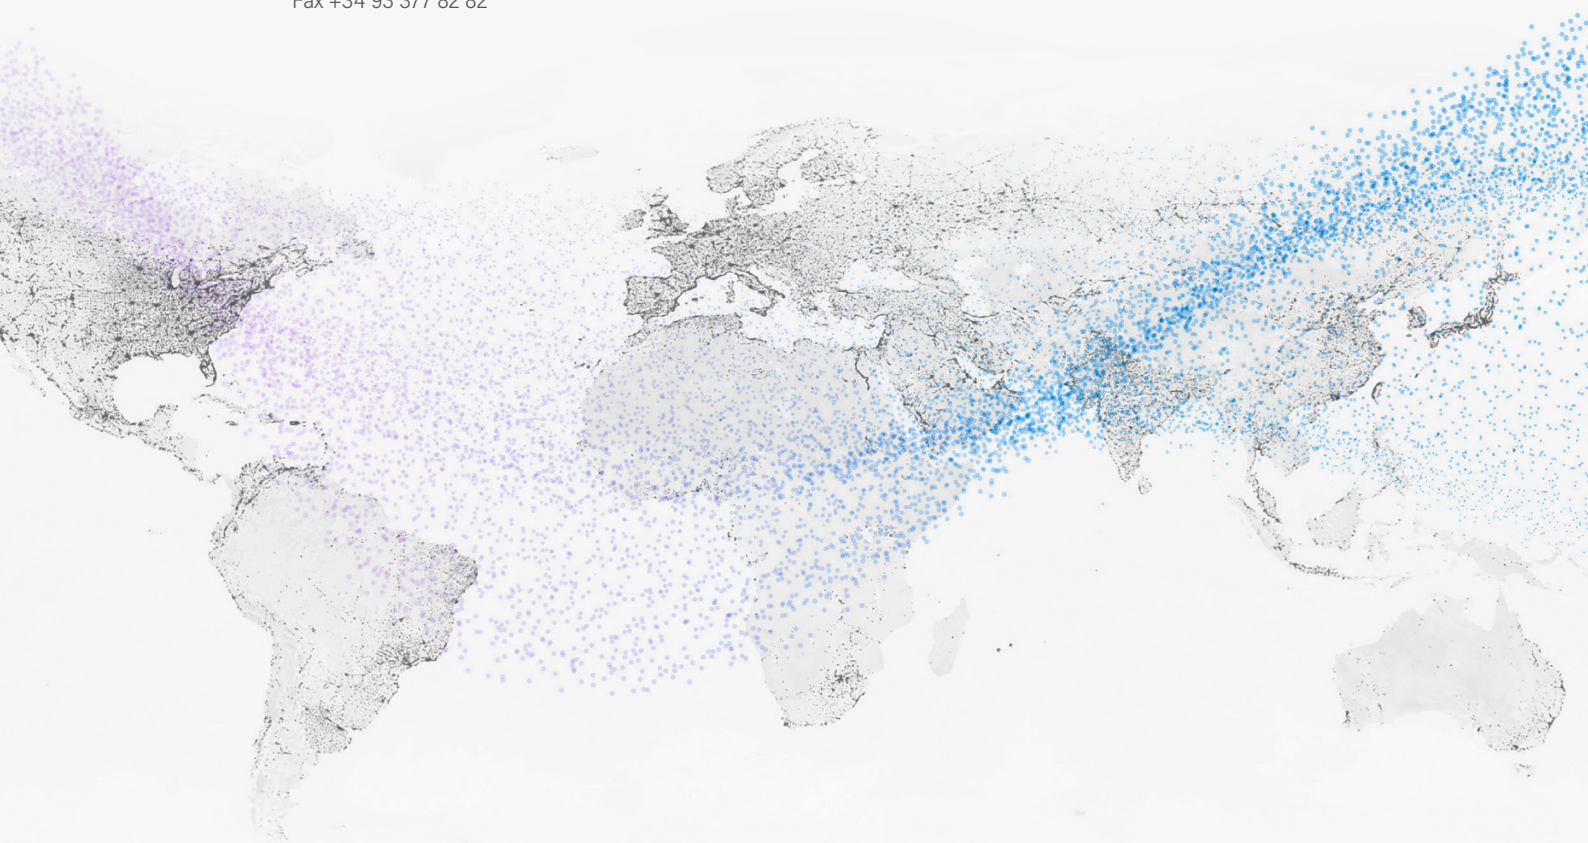

dfelectric.es



According to the waste of electrical and electronic equipment directive, electrical material should not be part of the usual waste. This symbol alerts users that these products should be recycled according to local environmental waste disposal regulations.



The "electro technical expert" logo marked on the products included in this data sheet indicates that the installation of these products must be carried out by expert personnel with specialized knowledge.



To prevent electrical hazards, carry out the installation without voltage.



Safety notice
Please capture the following QR code and read our safety notice carefully before installing our products.



The data reflected in this technical record are subject to the correct installation of the product in accordance with manufacturer's instructions, relevant installation standards and professional practices, maintained and used in applications for which they were made.

The products described in this document have been designed, developed and tested in accordance with specific standard. They are considered components that are integrated as part of installation, machine or equipment. The correct general operation of the referred product is responsibility of the manufacturer of the installation, machine or equipment.

DF ELECTRIC cannot guarantee the characteristics of an installation, machine or equipment that has been designed by a third party. Once a product has been selected, the user must verify that it is appropriate for its application, through the verifications and/or tests that it deems appropriate.

DF ELECTRIC retains the right to change the dimensions, specifications, materials or design of its products at any time with or without notice.

©2022 DF Electric. All rights reserved