

CYLINDRICAL

FUSE LINKS & FUSE HOLDERS/BASES



neutral links

for cylindrical fuse links

CYL



8x32

10x38

14x51

22x58

PROTECTING THE WORLD



dfelectric.es

neutral links

for cylindrical fuse links

8x32

10x38

14x51

22x58

8x32

10x38

14x51

22x58

Neutral links for cylindrical fuse links

Neutral links for sizes 5x20, 8x32, 10x38, 10x85 14x51 and 22x5.

Manufactured in tinned brass.

All materials are according to the European Directive RoHS (Restriction of the use of certain hazardous substances in electrical material).



Technical data

Maximum nominal current

8x32 → 25A
10x38 → 32A
14x51 → 50A
22x58 → 125A


Rated voltage

up to 1000V AC/DC

Range

REFERENCE	DESCRIPTION	PACKING Uni /BOX
430000	NEUTRAL LINK 8x32	10/100
431000	NEUTRAL LINK 10x38	10/100
432000	NEUTRAL LINK 14x51	10/50
433000	NEUTRAL LINK 22x58	10/50

Dimensions

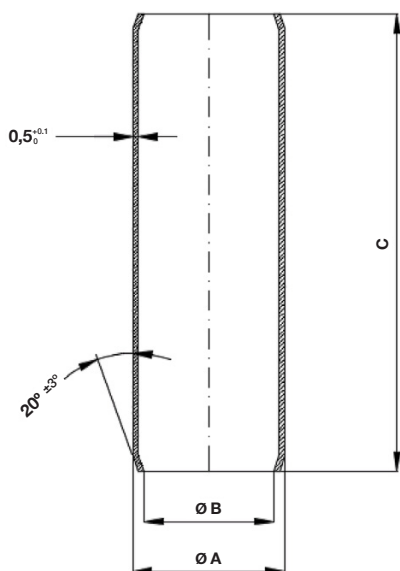

REF

A

B

C

430000

 $\varnothing 8,5^{+0.1}$
 $\varnothing 6,5^{+0.5}$

31,5 $^{+0.3}$

431000

 $\varnothing 10,3^{+0.1}$
 $\varnothing 8,5^{+0.5}$

38 $^{+0.3/-0.6}$

432000


 $\varnothing 14,3^{+0.1}$
 $\varnothing 12^{+0.5}$

51 $^{+0.3/-0.5}$

433000

 $\varnothing 22,2^{+0.1}$
 $\varnothing 19^{+0.5}$

57 $^{+0/-1}$

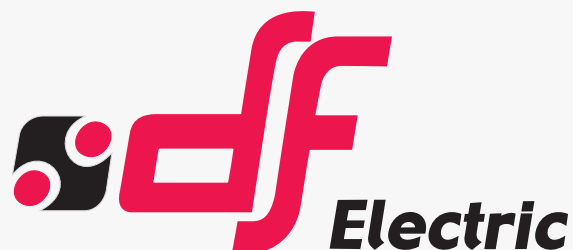

PROTECTING THE WORLD



HEAD OFFICE AND FACTORY


SILICI, 67-69
08940 CORNELLA DE LLOBREGAT
BARCELONA · SPAIN
Tel. +34 93 377 85 85
Fax +34 93 377 82 82

INTERNATIONAL SALES

Tel. +34 93 475 08 64
Fax +34 93 480 07 75
export@dfelectric.es

NATIONAL SALES

Tel. 93 475 08 64
Fax 93 480 07 76
comercial@dfelectric.es

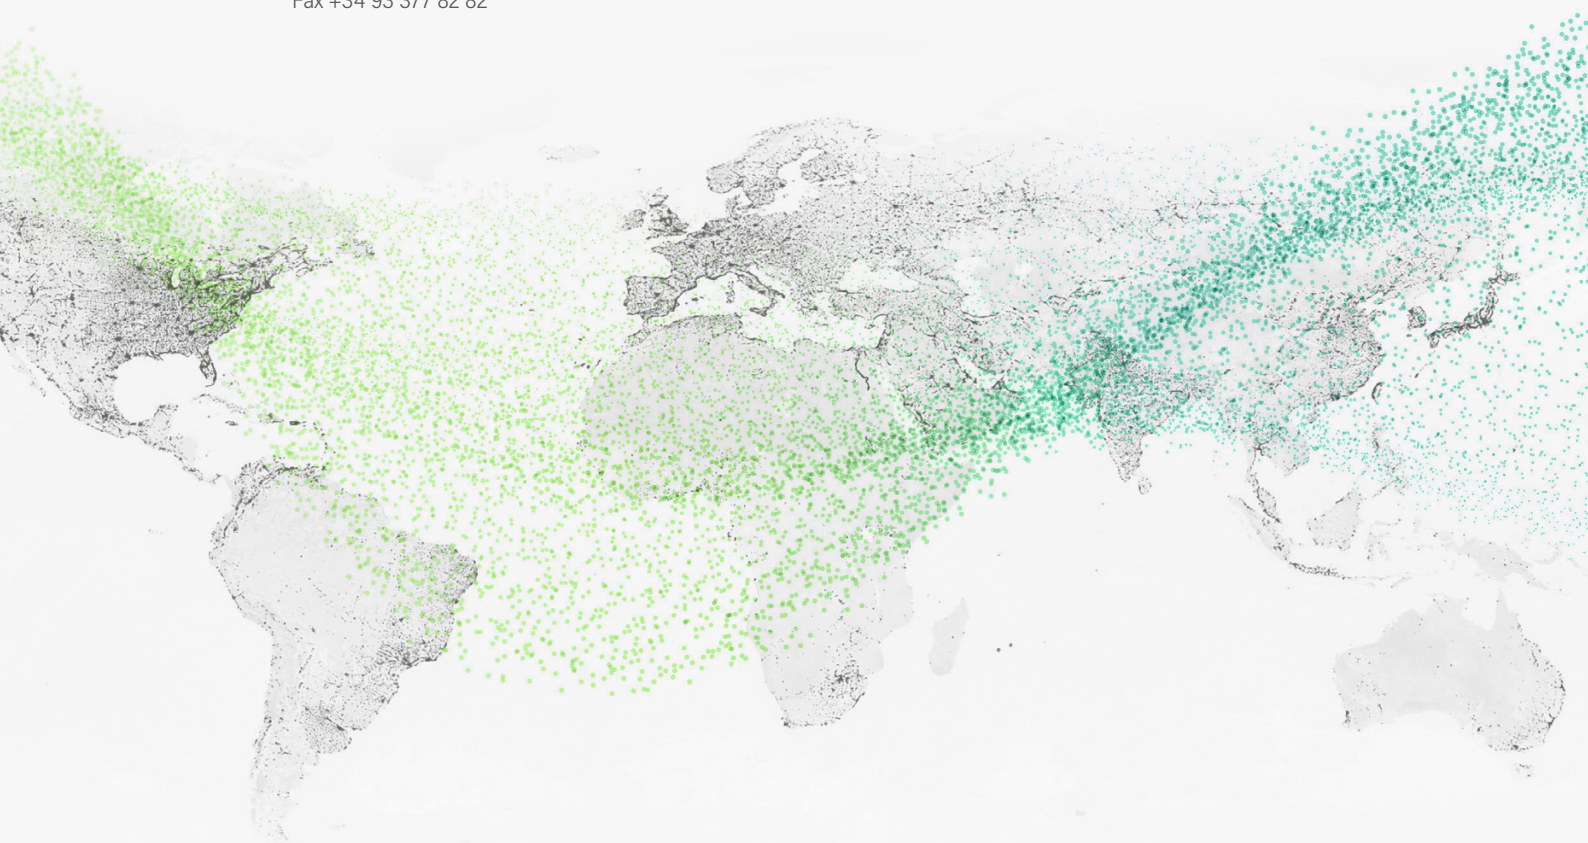

dfelectric.es



According to the waste of electrical and electronic equipment directive, electrical material should not be part of the usual waste. This symbol alerts users that these products should be recycled according to local environmental waste disposal regulations.



The "electro technical expert" logo marked on the products included in this data sheet indicates that the installation of these products must be carried out by expert personnel with specialized knowledge.



To prevent electrical hazards, carry out the installation without voltage.



Safety notice
Please capture the following QR code and read our safety notice carefully before installing our products.



The data reflected in this technical record are subject to the correct installation of the product in accordance with manufacturer's instructions, relevant installation standards and professional practices, maintained and used in applications for which they were made.

The products described in this document have been designed, developed and tested in accordance with specific standard. They are considered components that are integrated as part of installation, machine or equipment. The correct general operation of the referred product is responsibility of the manufacturer of the installation, machine or equipment.

DF ELECTRIC cannot guarantee the characteristics of an installation, machine or equipment that has been designed by a third party. Once a product has been selected, the user must verify that it is appropriate for its application, through the verifications and/or tests that it deems appropriate.

DF ELECTRIC retains the right to change the dimensions, specifications, materials or design of its products at any time with or without notice.

©2021 DF Electric. All rights reserved