



NH KNIFE-BLADE

FUSE LINKS & FUSE BASES

aM

NH 500V/690V

fuse links



PROTECTING THE WORLD



RATED VOLTAGE

690V AC
500V AC

RATED CURRENT


6A...200A

BREAKING CAPACITY

80kA @ 690V
120kA @ 500V

STANDARDS

IEC/EN 60269-1
IEC/EN 60269-2

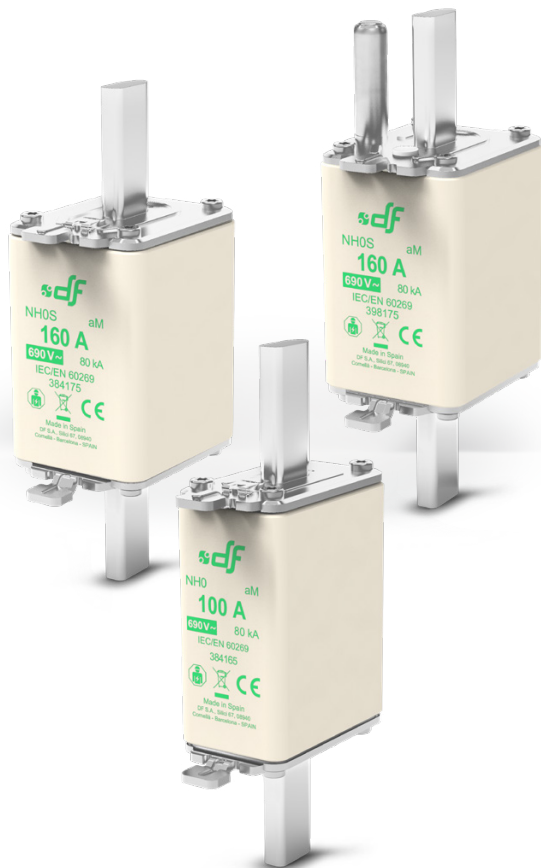

Knife type NH aM 500V/690V fuse links with top indicator

These high breaking capacity fuse-links are intended for short circuit protection in motors, transformer and other load with high inrush currents, with rated voltages up to 690V (+5%).

The rated breaking capacity is 80kA at 690V or 120kA at 500V. Excellent protection of switchgear (contactor, thermal switch) due to the good current limiting capability and low I^2t values. These fuse links must be associated to an overload device protection (thermal switch).

Compact versions in low rated currents of every size.

The range comprises the following fuse links:

- Size NH0 aM 500V/690V 6A to 160A
- Size NH0S aM 500V/690V 125A to 200A
- Size NH0S with striker aM 500V/690V 32A to 200A

Manufactured with ceramic body with high withstand to internal pressure and thermal shock, that allows a high breaking capacity. Knife contacts are made of silver plated copper or brass.

They are manufactured according to IEC/EN60269 Standards and comply with RoHS directive.




Range

	U _n	BREAKING CAPACITY	I _n	REFERENCE	PACKING
			(A)		Uni /BOX
NH0	690V	80kA	6	384110	3/42
			10	384115	3/42
			16	384120	3/42
			20	384125	3/42
			25	384130	3/42
			32	384135	3/42
			35	384140	3/42
			40	384145	3/42
			50	384150	3/42
			63	384155	3/42
			80	384160	3/42
			100	384165	3/42
	500V	120kA	125	383170	3/42
			160	383175	3/42

	U _n	BREAKING CAPACITY	I _n	REFERENCE	PACKING
			(A)		Uni /BOX
NH0S	690V	80kA	125	384170	3/30
			160	384175	3/30
	500V	120kA	200	383180	3/30
			32	398135	3/30
NH0S WITH STRIKER	690V	80kA	35	398140	3/30
			40	398145	3/30
			50	398150	3/30
			63	398155	3/30
			80	398160	3/30
			100	398165	3/30
			125	398170	3/30
			160	398175	3/30
	500V	120kA	200	397180	3/30


Dimensions

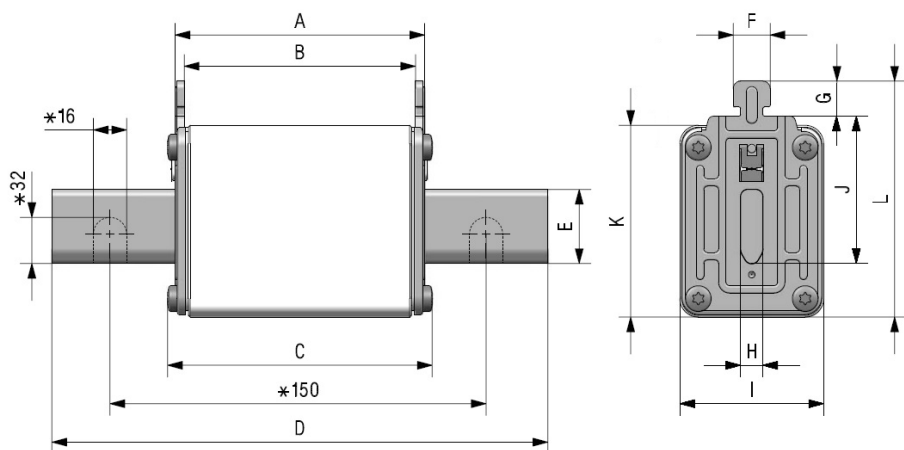

* Only for NH4 fuse links

	A	B	C	D	E	F	G	H	I	J	K	L
NH0	66	60,5	66,5	125	15	10	9,5	6	29	35	47	59
NH0S	66	62	66,5	125	15	10	9,5	6	39	35	47	59

Weight NH0: 250gr | NH0S: 310gr

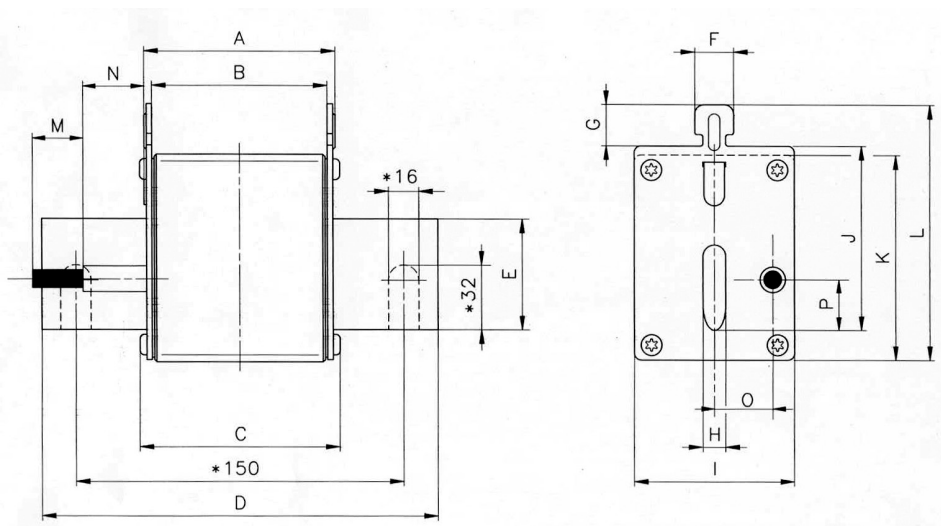

* Only for NH4 fuse links

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
66	62	66,5	125	15	10	9,5	6	39	35	47	59	15	29	14,5	14

Weight 320gr

Technical data

Rated voltage	690V +5% 500V +10%
Rated current	6A...200A
Rated breaking capacity	80kA @690V 120kA @500V
Utilization category	aM
Rated frequency	42...62Hz
Storage temperature	-40°C ... 90°C
Operating temperature *	-40°C ... 80°C

* For ambient temperatures higher than 25°C it is necessary to apply a derating in maximum current.

IEC/EN 60269-1
IEC/EN 60269-2
RoHS Compliant



Standards

Materials


Body	Steatite C221
Contact blades	Copper or brass (silver plated)
Plates	Aluminium
Screws	Zinc plated steel

Power dissipation


	I _n	POWER DISSIPATION	PREARcing I _t	TOTAL I _t 230V	TOTAL I _t 400V	TOTAL I _t 500V
	(A)	(W)	≈ 4 ms (A²s)	(A²s)	(A²s)	(A²s)
NH0	6	0,4	160	324	387	542
	10	0,7	325	659	786	1100
	16	1,1	820	1619	1919	2650
	20	1,4	1240	2634	3179	4547
	25	1,6	2500	5310	6410	9167
	32	1,9	3200	6796	8204	11733
	35	2,0	4100	8708	10512	15033
	40	2,3	6000	12743	15383	22000
	50	3,1	9000	18820	22632	32130
	63	4,1	16300	33697	40405	57050
	80	5,0	19600	40519	48586	68600
NH0 NH0S	100	6,6	36000	74423	89239	126000
	125	8,2	53000	99787	116890	157872
	160	10,5	82000	154388	180848	244255
NH0S	200	12,3	167000	314425	368313	497447

* Same data for STRIKER range (32A up to 200A)


t-I characteristics

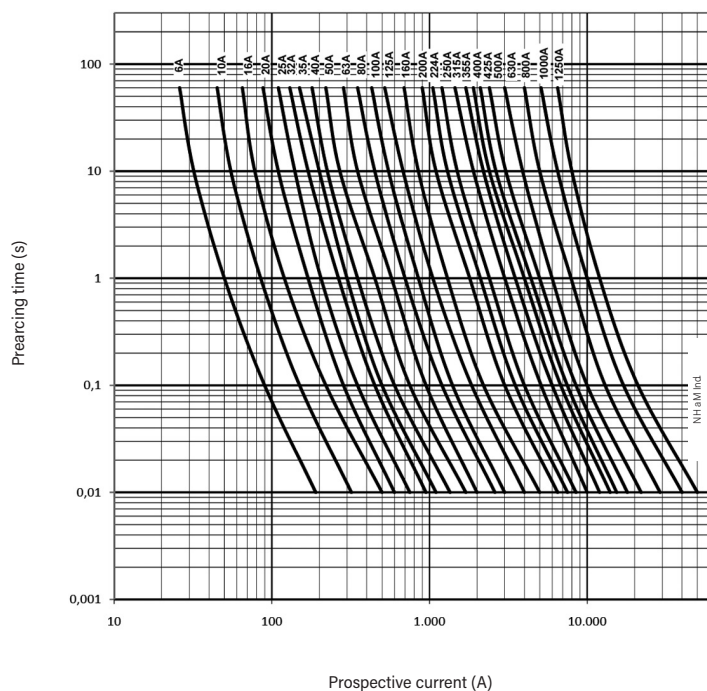

Cut-off characteristics

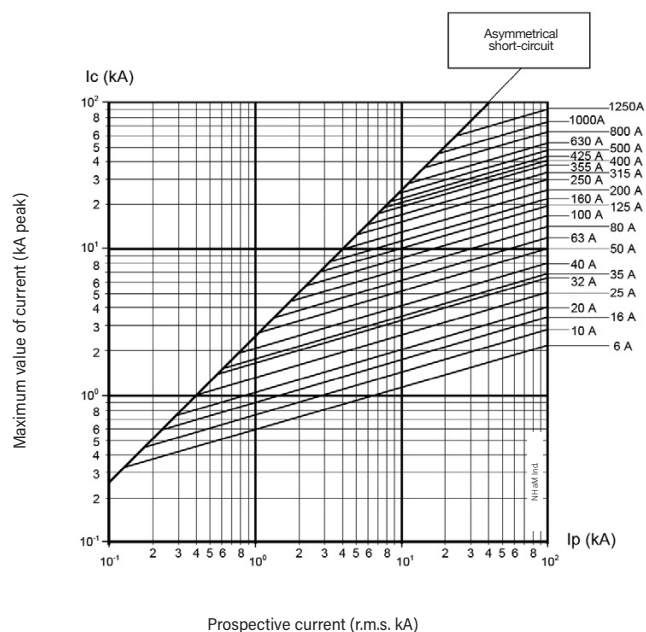

Ambient temperature derating factor

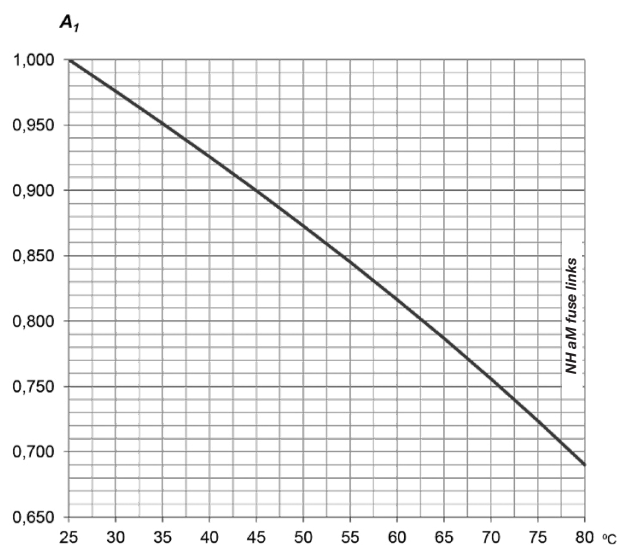

t_a (°C)	A_1
25	1,00
30	0,98
35	0,95
40	0,93
45	0,90
50	0,87
55	0,84
60	0,82
65	0,79
70	0,76
75	0,72
80	0,69



PROTECTING THE WORLD



HEAD OFFICE AND FACTORY


SILICI, 67-69
08940 CORNELLA DE LLOBREGAT
BARCELONA · SPAIN
Tel. +34 93 377 85 85
Fax +34 93 377 82 82

INTERNATIONAL SALES

Tel. +34 93 475 08 64
Fax +34 93 480 07 75
export@dfelectric.es

NATIONAL SALES

Tel. 93 475 08 64
Fax 93 480 07 76
comercial@dfelectric.es

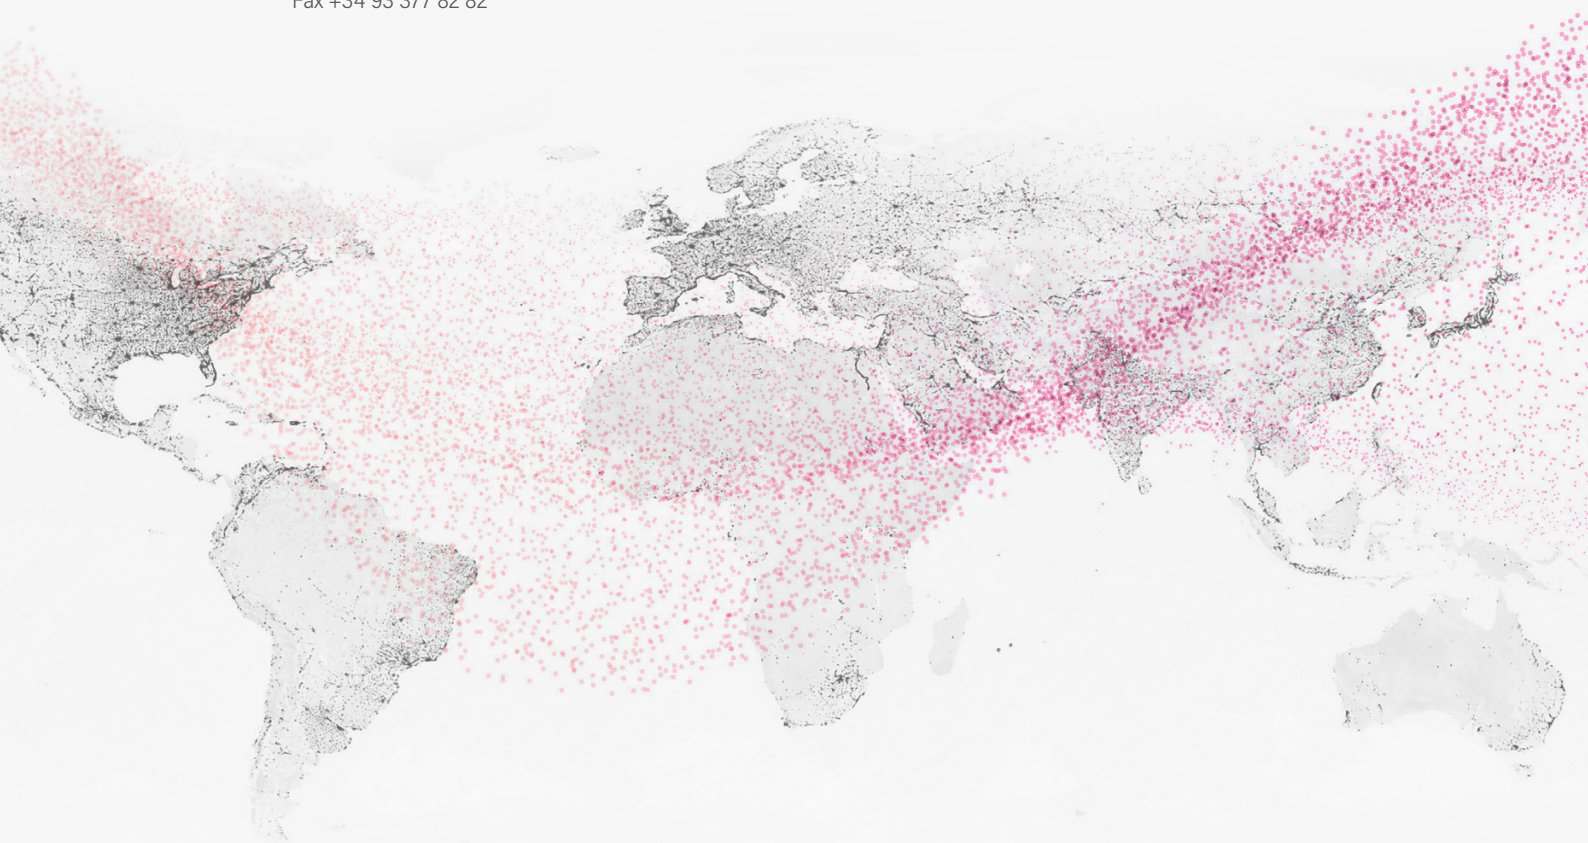

dfelectric.es



According to the waste of electrical and electronic equipment directive, electrical material should not be part of the usual waste. This symbol alerts users that these products should be recycled according to local environmental waste disposal regulations.



The "electro technical expert" logo marked on the products included in this data sheet indicates that the installation of these products must be carried out by expert personnel with specialized knowledge.



To prevent electrical hazards, carry out the installation without voltage.



Safety notice
Please capture the following QR code and read our safety notice carefully before installing our products.



The data reflected in this technical record are subject to the correct installation of the product in accordance with manufacturer's instructions, relevant installation standards and professional practices, maintained and used in applications for which they were made.

The products described in this document have been designed, developed and tested in accordance with specific standard. They are considered components that are integrated as part of installation, machine or equipment. The correct general operation of the referred product is responsibility of the manufacturer of the installation, machine or equipment.

DF ELECTRIC cannot guarantee the characteristics of an installation, machine or equipment that has been designed by a third party. Once a product has been selected, the user must verify that it is appropriate for its application, through the verifications and/or tests that it deems appropriate.

DF ELECTRIC retains the right to change the dimensions, specifications, materials or design of its products at any time with or without notice.

©2020 DF Electric. All rights reserved