

RAPIDPLUS


HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

Rapidplus®




microswitch system

for **square body**
aR semiconductor protection
fuse links

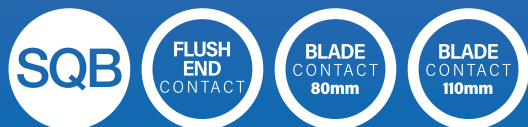


**PROTECTING
THE WORLD**





RATED VOLTAGE
250V AC

RATED CURRENT
4A

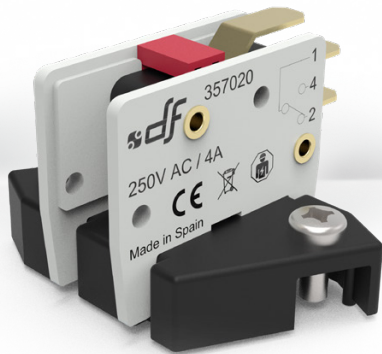

Microswitch system for **square body** aR semiconductor protection fuse links

Detects the fusion.

Manual assembly.

Compact design.

Manufactured with plastic materials with high temperature resistance and self-extinguishable.

All materials are according to the European Directive RoHS (Restriction of the use of certain hazardous substances in electrical material) and they are halogen free.

Kit includes the striker support, two fixing screws and the microswitch ref. 357020.



Range

REFERENCE	DESCRIPTION	PACKING Uni /BOX
357015	MICROSWITCH SYSTEM* FOR SQUARE BODY aR 690V FUSE LINKS	1/10

* Kit includes the striker support, two fixing screws and the microswitch ref. 357020



Technical data

Contact type	Changeover (NO-NC)
Connection	Fast-on terminals 6,3 x 0,8mm
Ambient temperature of service	-40°C ... 80°C


AC

Type of load	Maximum operating current			
	24V	48V	127V	250V
AC-12 Resistive	20A	20A	16A	16A
AC-15 Inductive	6A	6A	5A	4A

DC

Type of load	Maximum operating current			
	24V	48V	127V	250V
DC-12 Resistive	2,5A	2,5A	0,8A	0,3A
DC-13 Inductive	2,5A	1,2A	0,35A	0,2A


Dimensions

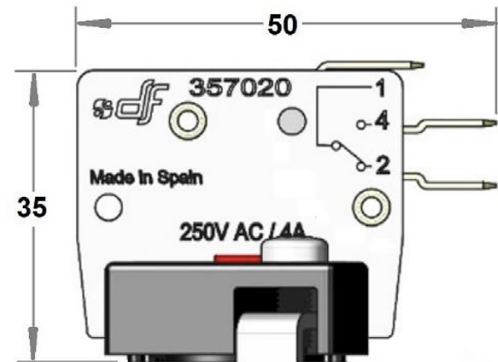

Weight 23,5gr

Materials

Terminals	Brass
Contacts	Silver
Body	Thermoplastic with high resistance to temperature

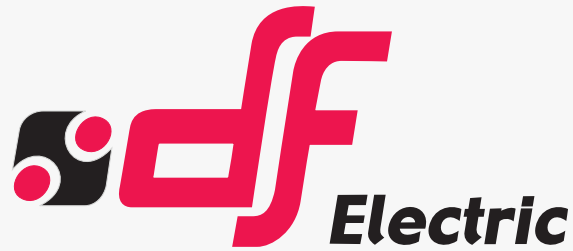


PROTECTING THE WORLD



HEAD OFFICE AND FACTORY
SILICI, 67-69
08940 CORNELLA DE LLOBREGAT
BARCELONA · SPAIN
Tel. +34 93 377 85 85
Fax +34 93 377 82 82

INTERNATIONAL SALES
Tel. +34 93 475 08 64
Fax +34 93 480 07 75
export@dfelectric.es

NATIONAL SALES
Tel. 93 475 08 64
Fax 93 480 07 76
comercial@dfelectric.es

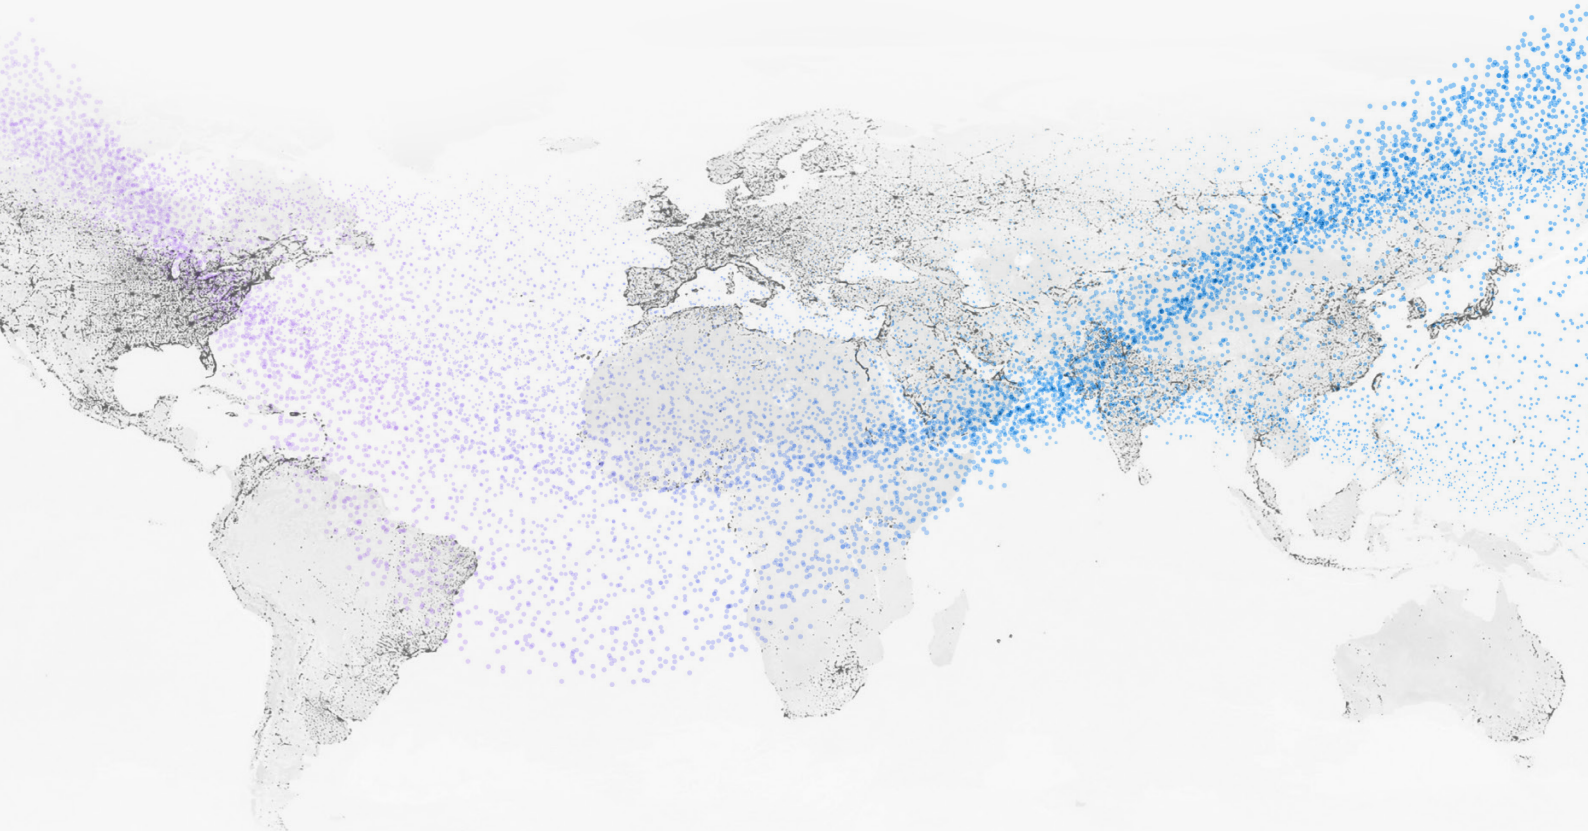

dfelectric.es



According to the waste of electrical and electronic equipment directive, electrical material should not be part of the usual waste. This symbol alerts users that these products should be recycled according to local environmental waste disposal regulations.



The "electro technical expert" logo marked on the products included in this data sheet indicates that the installation of these products must be carried out by expert personnel with specialized knowledge.



To prevent electrical hazards, carry out the installation without voltage.



Safety notice
Please capture the following QR code and read our safety notice carefully before installing our products.



The data reflected in this technical record are subject to the correct installation of the product in accordance with manufacturer's instructions, relevant installation standards and professional practices, maintained and used in applications for which they were made.

The products described in this document have been designed, developed and tested in accordance with specific standard. They are considered components that are integrated as part of installation, machine or equipment. The correct general operation of the referred product is responsibility of the manufacturer of the installation, machine or equipment.

DF ELECTRIC cannot guarantee the characteristics of an installation, machine or equipment that has been designed by a third party. Once a product has been selected, the user must verify that it is appropriate for its application, through the verifications and/or tests that it deems appropriate.

DF ELECTRIC retains the right to change the dimensions, specifications, materials or design of its products at any time with or without notice.

©2023 DF Electric. All rights reserved